


Question: 1

Refer to the exhibit. All three of the conditions for the Choice router are true. What message processors are executed?

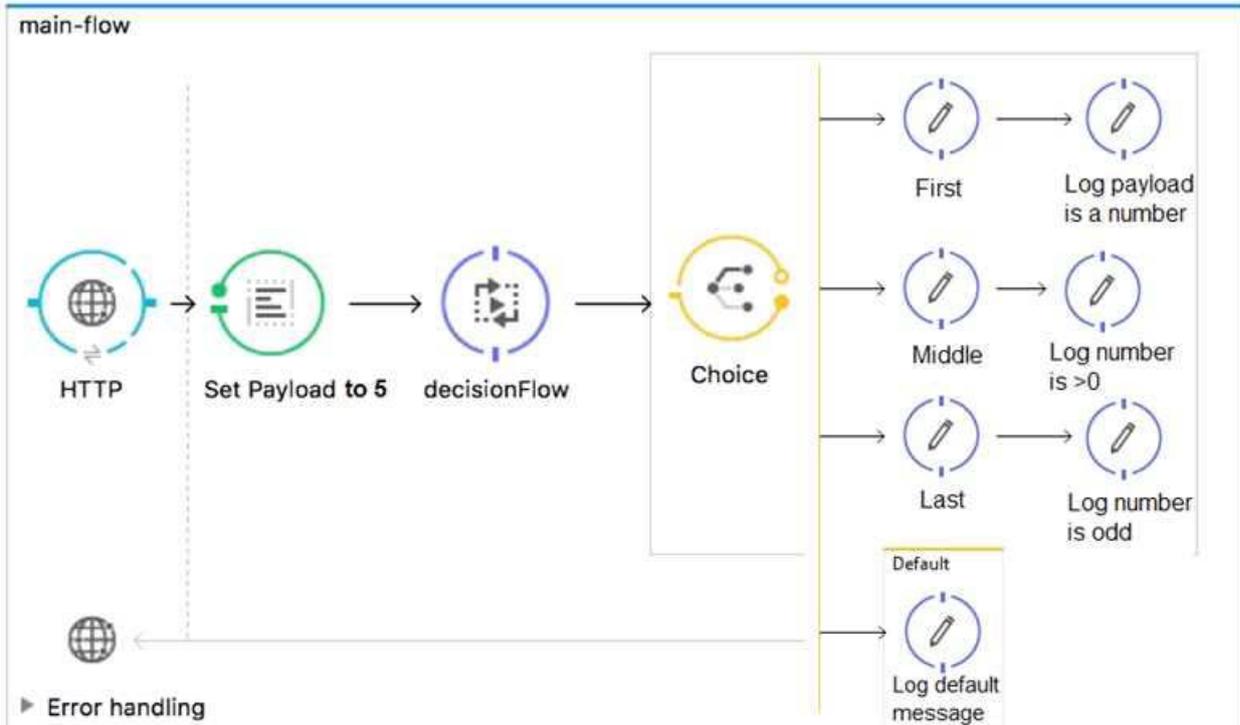

- A. First
- B. First, Default
- C. First, Middle, Last
- D. First, Middle, Last, Default

Answer: C

Reference:


<https://docs.mulesoft.com/mule-runtime/3.9/choice-flow-control-reference>

Question: 2

Refer to the exhibits. A Mule application is configured to use the globalErrorHandler exception handler.

When the flow is executed, a request is made to a host that is currently offline and a Java exception is thrown with the message "Error sending HTTP request to http://offline.bad:80/".

What response is returned to a web client request to postToOfflineHostFlow's HTTP Listener?

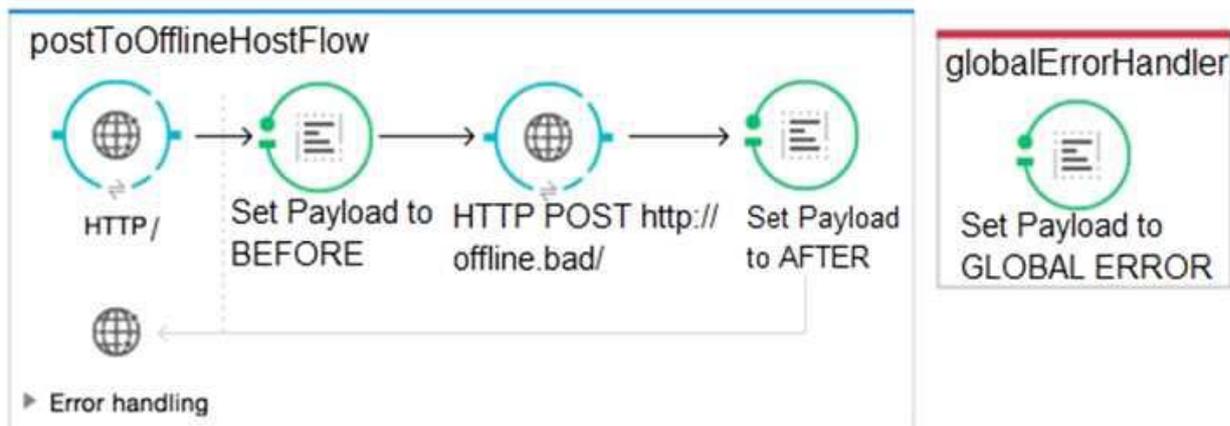


- A. AFTER
- B. BEFORE
- C. Error sending HTTP request to http://offline.bad:80/
- D. GLOBAL ERROR

Answer: C

Question: 3

Refer to the exhibits. The http:request has failed with a Timeout exceeded error. What HTTP Request parameter must be modified to resolve this error?

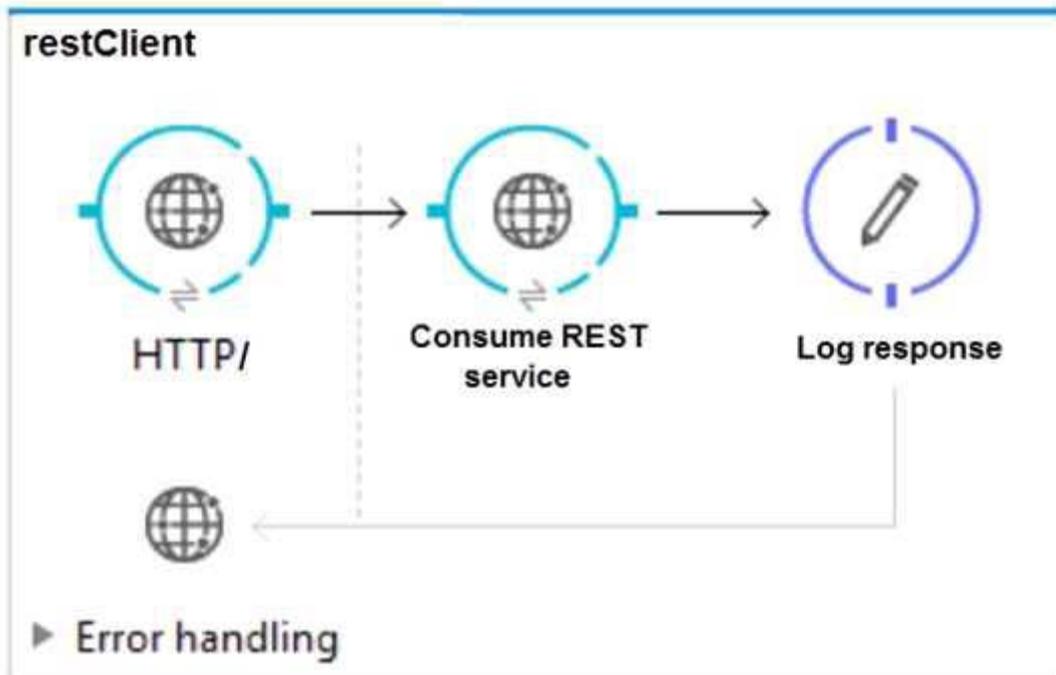

```

*****
Message      : Error sending HTTP request to http://localhost:8082/.
Payload      : {NullPayload}
Payload Type  : org.mule.transport.NullPayload
Element      : /restClient/processors/0 @ mcd-assoc-4.01.02-ram-rest-consumer-error:rest-
consumer-error.xml:25
Element XML   : <http:request config-ref="HTTP_Request_Configuration_localhost8082"
path="/" method="GET" doc:name=
-----
-----

Root Exception stack trace:
java.util.concurrent.TimeoutException: Timeout exceeded

    at com.ning.http.client.providers.grizzly.GrizzlyAsyncHttpProvider.timeout
(GrizzlyAsyncHttpProvider.java:433)
    at com.ning.http.client.providers.grizzly.GrizzlyAsyncHttpProvider$3.onTimeout
(GrizzlyAsyncHttpProvider.java:281)
    at org.glassfish.grizzly.utils.IdleTimeoutFilter$DefaultWorker.doWork
(IdleTimeoutFilter.java:402)
    at org.glassfish.grizzly.utils.IdleTimeoutFilter$DefaultWorker.doWork
(IdleTimeoutFilter.java:381)
    at org.glassfish.grizzly.utils.DelayedExecutor$DelayedRunnable.run(DelayedExecutor.java:158)
    at java.util.concurrent.ThreadPoolExecutor.runWorker(ThreadPoolExecutor.java:1142)
    at java.util.concurrent.ThreadPoolExecutor$Worker.run(ThreadPoolExecutor.java:617)
    at java.lang.Thread.run(Thread.java:745)

*****

```

- A. Client Certificate Timeout
- B. Transaction Timeout
- C. Connect Idle Timeout
- D. Response Timeout

Answer: D

Reference:

<https://help.mulesoft.com/s/article/Getting-Error-sending-HTTP-request-when-sendingrequestusing-http-requester>

Question: 4

Refer to the exhibit. What DataWeave expression transforms the input to the output?

```

json_1.json
[
  {
    "orderID": 592,
    "shipping": "international",
    "item": "T-shirt Navy",
    "size": "L",
    "quantity": 1,
    "price": 20
  },
  {
    "orderID": 972,
    "shipping": "domestic",
    "item": "Cargo shorts",
    "size": "L",
    "quantity": 2,
    "price": 30
  }
]

```

Output Payload

```

1= $dw 1.0
2= %output application/xml
3
4
5 ---
6 =
7 =
8 =
9
10
11
12
13
14
15
16

```

```

<?xml version='1.0' encoding='UTF-8'?>
<order>
  <item>
    <itemName>T-shirt Navy</itemName>
    <total>20</total>
  </item>
  <item>
    <itemName>Cargo shorts</itemName>
    <total>60</total>
  </item>
</order>

```

- A. order:
- ```

{
 payload map item: {
 itemName: $.item,
 total: $.price * $.quantity
 }
}

```
- B. order:
- ```

payload map item: {
  itemName: $.item,
  total: $.price * $.quantity
}

```
- C. {
- ```

payload map order: { item:
 itemName: $.item,
 total: $.price * $.quantity
}
}

```
- D. payload map order: item: {
- ```

  itemName: $.item,
  total: $.price * $.quantity
}

```

- A. Option A
- B. Option B
- C. Option C
- D. Option D


Answer: A

Reference:

<https://blogs.mulesoft.com/dev/anypoint-platform-dev/weaving-it-with-dataweave-expression/>

Question: 5

Refer to the exhibit. What is the output payload in the On Complete phase?

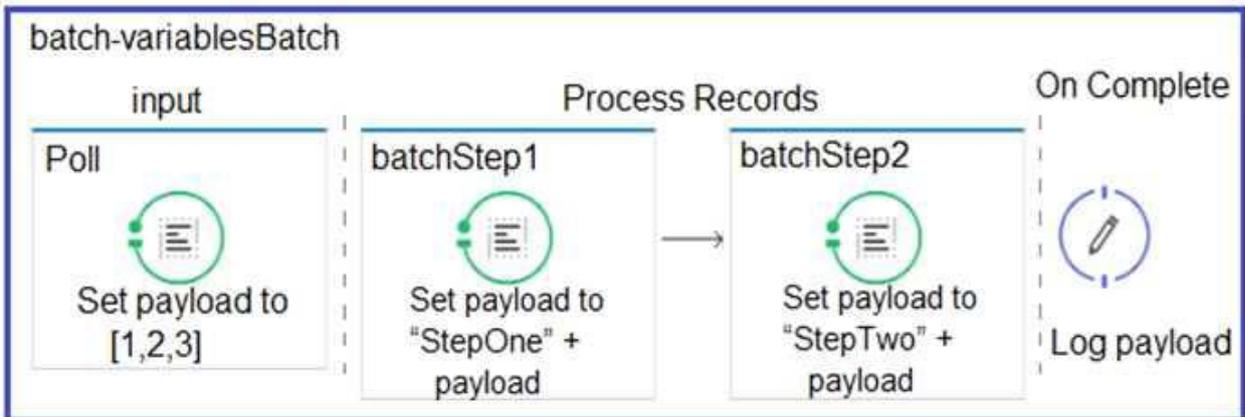

- A. The records processed by all batch steps: [StepTwoStepOne1, StepTwoStepOne2, StepTwoStepOne3]
- B. Summary statistics with NO record data
- C. The original payload: [1,2,3]
- D. The records processed by the last batch step: [StepTwo1, StepTwo2, StepTwo3]

Answer: D

Reference:

<https://docs.mulesoft.com/mule-runtime/4.2/batch-processing-concept>